

CATV

56EYA 2U Series High Power Er/Yb Doped Fiber Amplifier



■ Performance characteristics


- ◆ Adopts world top brand pump lasers and the OFS fiber of United States, advanced LG switch low-power circuit design, greatly reducing the overall power consumption and heat.
- ◆ Perfect APC, ACC, ATC control, users use in different networks, good ventilation design and temperature-controlled fan, ensure the long life and high reliability of PUMP laser.
- ◆ Using digital control chip, remote or local output power adjustable.
- ◆ Excellent protection circuit design, with light detection, optical return loss monitoring. Great protection of lasers and light path safety.
- ◆ Built-in low-noise preamplifier eliminates the need for cascaded EDFA, allowing input light to be as low as -5dBm, greatly reducing CNR and MER degradation.
- ◆ Demultiplexer for 1310/1490/1560nm EPON and GPON. It greatly facilitates network applications with PON. Low noise figure (type $\leq 4.5\text{dB}$, Max $\leq 5.0\text{dB}$);
- ◆ The total output optical power is optional: 2-10W (33-40dBm);
- ◆ The front panel can be removed and replaced flexibly according to the number of output ports; Can add a built-in optical switch module to facilitate the expansion of the device function; Cooling fan supports online replacement;
- ◆ The front panel LCD provides the operating parameters and alarms of the entire unit. RJ45 provides serial communication and SNMP network management interface; Carrier-grade dual power hot backup, CPU assignable power.

■ Applications

The 56EYAx series high power amplifier is a high power multi-output optical fiber amplifier with a gain spectrum bandwidth of 1535~1565nm. It is mainly designed for CATV or 1~8 continuous strip channels (ITU wavelength) applications. It provides a flexible, low-cost solution for large-scale FTTH coverage of CATV systems in large and medium-sized cities.

56EYAx can achieve single-wavelength cable TV transmission, CWDM single-fiber three-wave, flat-gain type, DWDM; its reliable and excellent performance ratio between the main application of FTTH, FTTB, DBS, MMDS, FTTX pon, is to build CATV large Medium-sized optical fiber transmission network is an important equipment.

■ Block diagram

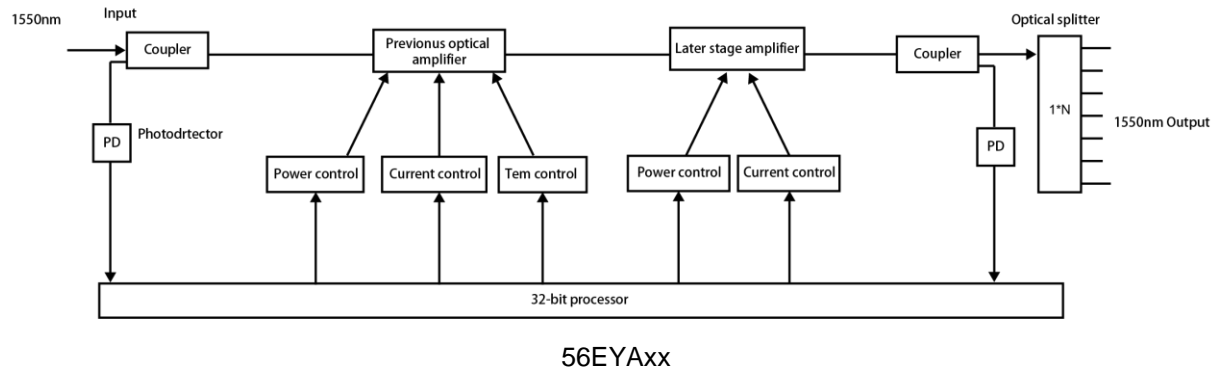

■ Limit parameter

Technical parameters		56EYAx
Max wavelength		1535-1565nm
Minimum input power		-10dBm
Max input power		+10dBm
Limited working temperature		-25°C ~+70°C
Limited working voltage		AC90~265V&DC30~72V&DC30~72V


■ Technical parameters

Technical parameters		56EYAx
Wavelength		1535-1565nm
Input power		-5dBm~+10dBm (normal input -2dBm~+5dBm)
Output power		33dBm~40dBm (WDM -1dBm)
Output port		SC: 16/32/64; LC: 32/64/128
Each output power		10~23dBm or customized
Noise		< 5.0dB (Pin=0dB)
Polarization dependence loss (PDL)		< 0.3dB
Polarization dependence gain (PDG)		< 0.4dB
Polarization mode dispersion (PMD)		< 0.3dB
Pump leakage power		< -30dBm

Echo loss	≥ 56dB
Optical connector	SC/APC&SC/UPC&LC/APC&LC/UPC
Supply voltage	220V(AC90V~265V)&110V(AC90V-130V)&48V(DC30~72V)
Consumption	≤100w
Working temperature	-5°C ~+42°C
Storage temperature	-40°C ~+80°C
Working relative humidity	5~95%
Product net size	465(L)*480(W)*89(H)
Package dimension	640(L)*640(W)*200(H)

■ Model guide

56EYA2-Output port*Per port output power-Input optical connector+Main power supply voltage+Sub power supply voltage+Output connector-with WDM+WDM connector+OSW+Optical transmitter **(Note: When the black box has no order requirement, do not write).**

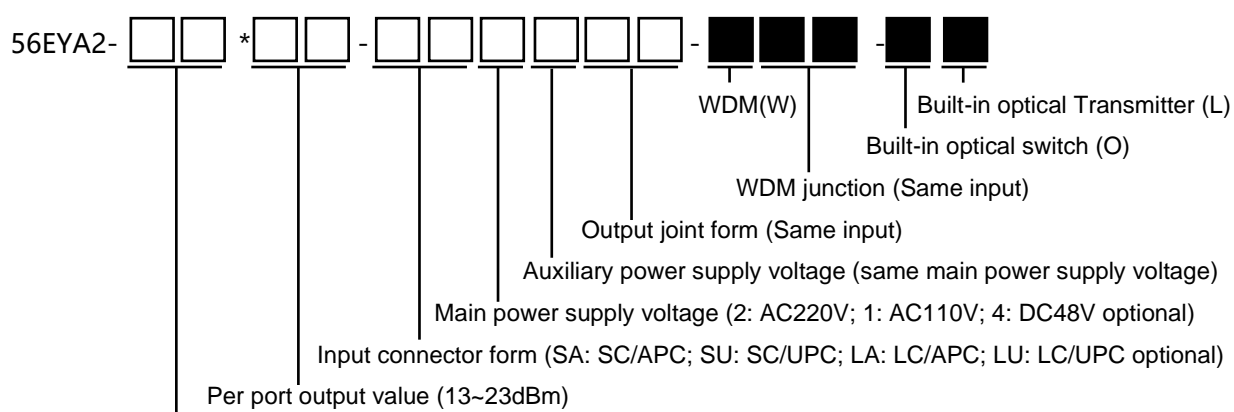

Number of output porta (SC: 16~64□; LC: 32~128□)


Example: 56EYA2-16*22-SA24SA-WSP-OL

Explanation: This 56EYA 2U device is the erbium and ytterbium Co-doped high power fiber amplifier with 16 port output, each output 22dBm, input connector SC/APC, main power supply: 220V, sub powersupply: 48V, output connector SC/APC, with WDM, WDM connector SC/APC, built-in OSW and optical transmitter.

■ Package & Label



1 pc/carton

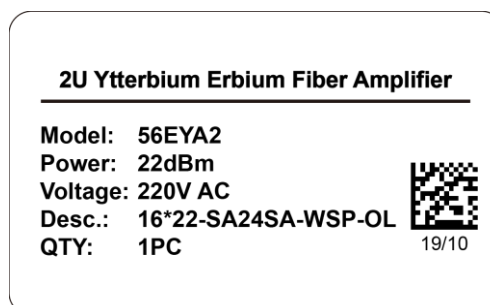

Product label